

IP65 LOGO PROJECTOR INSTALL INSTRUCTION

1.Connection Mode

Yellow wire:The neutral wire.

Brown/Blue wire:Regardless of positive and negative pole.



2.Installation Mode-The Projector

- I. Fix the metal bottom on the wall, and turn the projector to the right direction.
- II. Rotate the lens to get a clear picture, then fasten the iron ring to compact the rubber ring to assure water resistance.



3.Installation Mode-The GOBO Glass

- I. Take off the lens.
- II. Take off the circlip.
- III. Change the gobo carefully with the right side towards the inside.



4.Warning

- Always disconnect from power before opening.
- Cool down before opening.
- Min.dist.to flammable materials:1ft.Min.dist.to projection surface:3ft.
- High pressure lamp can explode if handed incorrectly.
- DO NOT look directly into the lens, due to a risk of serious eye and skin damage.
- DO NOT turn on w/o covers attached.

IP65 LOGO PROJECTOR INSTALL INSTRUCTION



Projection angle demonstration

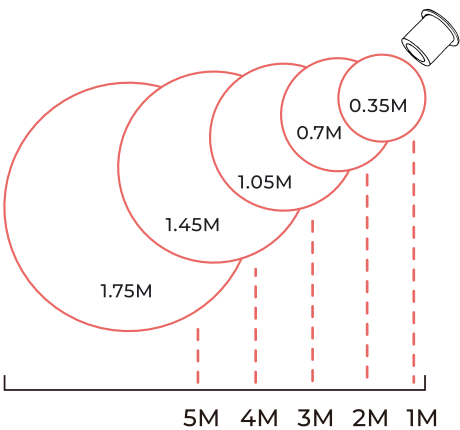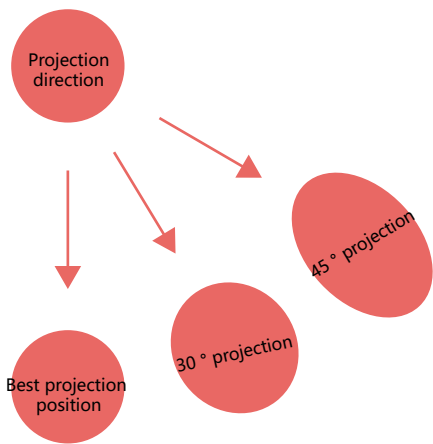

Remote control instructions

